


- Acier Inoxydable 316L
- Filetage GAZ CONIQUE suivant NFE 03004
- Portée conique
- Entièrement usiné
- Pression de service 80 bars
- Température : jusqu'à 300 °C

- AISI 316L Stainless steel
- BSPT Threaded
- Conical seat
- Machined
- Pressure : 1000 PSI
- Temperature : up to 572°F

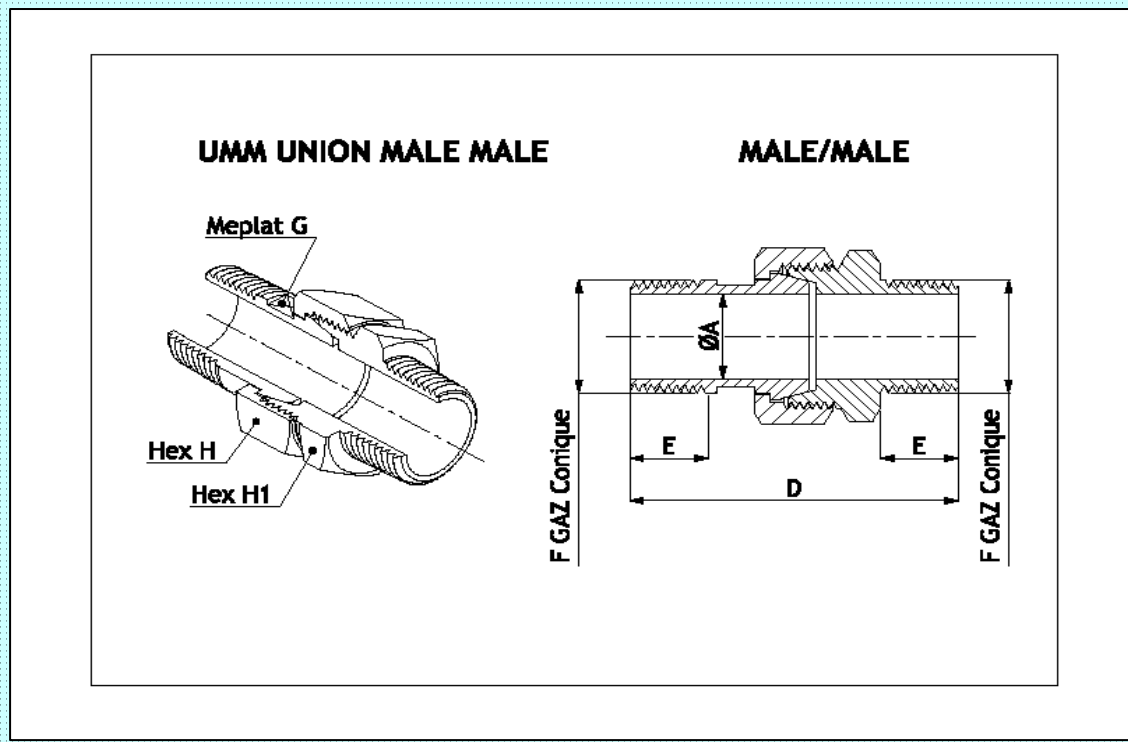

REF	ØA	D	E	F	G	H	H1	Poids (kg)
UMM08	9,0	48,0	11,0	1/4"	12	22	17	0,055
UMM12	12,0	53,5	12,0	3/8"	15	27	22	0,094
UMM15	15,0	65,0	15,0	1/2"	19	32	27	0,156
UMM20	20,0	71,5	17,0	3/4"	24	38	35	0,212
UMM25	26,0	81,5	19,0	1"	30	47	43	0,363
UMM32	33,0	92,0	22,0	1"1/4	38	53	49	0,516
UMM40	40,0	97,0	22,0	1"1/2	45	60	56	0,608
UMM50	50,0	107,5	26,0	2"	55	75	70	1,034

Informations techniques et illustrations fournies à titre indicatif et susceptibles de modifications.